



Gooch & Housego



AOM Driver
Model: CHP150-3AC-D50
P/N: 97-02910-14
Rev: B
2.5 Watt RF Driver for
Acousto-Optic Modulators

Formerly: 1150AF-AINA-2.5HCR

The CHP150-3AC-D50 provides up to 2.5 Watts of RF power for a frequency of 150 MHz.

Fully adjustable with the screw potentiometer from 0.5 to 2.5 Watts.

An analog modulation signal controls the output RF power from 0 to 100% of the adjusted maximum power.

This driver is well suited for 150 MHz AO modulators requiring moderate amounts of RF power (1.5 - 2.5 Watts). It also is a good fit for the 150 MHz fiber coupled Q-switches.

Key Features:

- Output RF power 2.5 Watts
- RF ON/OFF ratio >45 dB
- Fast Analog modulation
- Constant RF output power design
- Conductive cooling through base plate

Applications:

- AOM driver for pulse fiber laser
- AOM applications with fast modulation
- Acousto-optic Modulators

General Specifications

Modulation Input

Input Impedance	50 Ohms
Analog Input (SMC)	0 to +1.0 VDC

RF Output

Center Frequency (Fc)	150 MHz \pm 0.1%
Output Power (SMA Female)	2.5 W
Rise/Fall Time	7 nsec Typ.
RF Contrast Ratio	45 dB min
Harmonic Distortion	-20 dBc Max
Output Impedance	50 Ohms
Output VSWR	1.5 : 1 Max
Power Supply Voltage	+24 V @ 775 mA Nominal

Document

10/23/12


Control

Contact: sales@goochandhousego.com www.goochandhousego.com

As part of our policy of continuous product improvement we reserve the right to change the specification at any time.


Document: 97-02910-14-50 Rev: A

AOM Driver
Model: CHP150-3AC-D50
P/N: 97-02910-14



Outline:

Dimensions (inches)

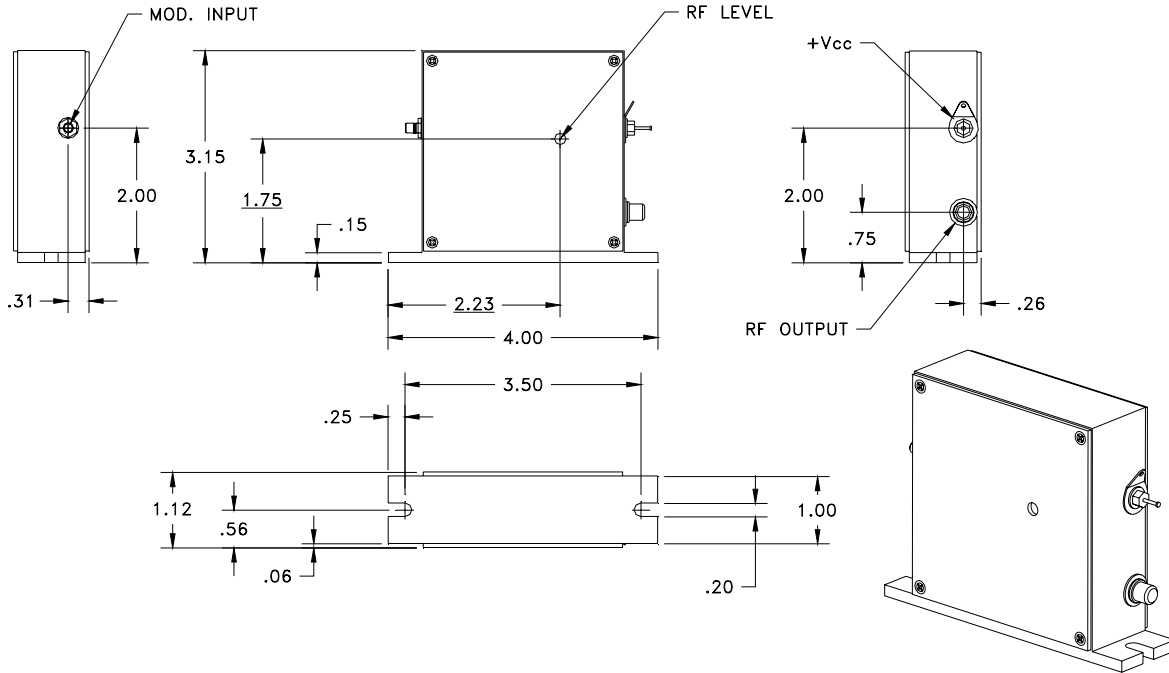

Ordering Information:



800 Village Walk #316
Guilford, CT 06437
Ph: 203-401-8093

Email orders to: sales@xsoptix.com
Fax orders to: 800-878-7282

Contact: sales@goochandhousego.com www.goochandhousego.com

As part of our policy of continuous product improvement we reserve the right to change the specification at any time.