

## FEATURES

- Output voltage up to 9 V<sub>pp</sub>
- Linear amplifier
- Flat gain up to 20 GHz
- Single voltage power supply
- Low group delay variation

## APPLICATIONS

- LiNbO<sub>3</sub> modulators
- OFDM, RF over fiber
- Linear amplification
- Research & Development

## OPTIONS

- Heat-sink

The DR-AN-20-MO is a wideband RF amplifier module designed for analog applications at frequencies up to 20 GHz.

The DR-AN-20-MO is characterized by a low Noise Figure and a linear transfer function whose 1 dB compression point is above 20 dBm. It exhibits flat Group Delay and Gain curves with reduced ripple over the entire bandwidth.

The DR-AN-20-MO operates from a single power supply for safety and ease of use, and offers gain control over 3 dB. The amplifier comes in a compact 52 mm x 25.6 mm housing with K type RF connectors (compatible SMA) and with an optional heat sink.

This amplifier module is ideally suited to drive optical modulators for analog applications.

## Performance Highlights

Parameter	Min	Typ	Max	Unit
Cut-off frequencies	50 k	20 G	-	Hz
Output voltage	0	-	9	V <sub>pp</sub>
Gain	28	30	-	dB
Saturated output power	23	-	-	dBm
Output power 1dB comp	20	21	-	dB
Harmonics	-	-	-15	dBc
Noise Figure	5	-	7	dB

Measurements for V<sub>bias</sub> = 12 V, V<sub>amp</sub> = 1.2 V, I<sub>bias</sub> = 305 mA

### Ordering Information:



800 Village Walk #316  
Guilford, CT 06437  
Ph: 203-401-8093

Email orders to: [sales@xsoptix.com](mailto:sales@xsoptix.com)  
Fax orders to: 800-878-7282

## DC Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage (fixed)	$V_{bias}$	-	12	-	V
Current consumption	$I_{bias}$	-	310	-	mA
Gain control voltage	$V_{amp}$	-	1.2	-	V

## Electrical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Lower frequency	$f_{3dB}^{lower}$	-3 dB point	-	-	50	kHz
Upper frequency	$f_{3dB}^{upper}$	-3 dB point	18	20	-	GHz
Gain	$S_{21}$	Small signal, $f < 15$ GHz	28	30	-	dB
Gain ripple	-	$f < 15$ GHz	-	-	$\pm 1.5$	dB
Input return loss	$S_{11}$	$f < 10$ GHz	-	-10	-	dB
Output return loss	$S_{22}$	$f < 20$ GHz	-	-10	-	dB
Isolation	$S_{12}$	$f < 20$ GHz	-	-60	-	dB
Output power 1dB	$P_{1dB}$	$2 \text{ GHz} < f < 16 \text{ GHz}$	20	21	-	dBm
Saturated output power	$P_{sat}$	$2 \text{ GHz} < f < 12 \text{ GHz}$	23	-	-	dBm
Output voltage	$V_{out}$	Linear	0	-	7	$V_{pp}$
		Maximum swing	0	-	9	
Noise Figure	NF	$f < 7 \text{ GHz} \& f > 18 \text{ GHz}$	5	-	7	dB
		$7 \text{ GHz} < f < 18 \text{ GHz}$	3	-	5	
Harmonics	Harm	@ $P_{1dB}$ , $f < 5 \text{ GHz}$	-	-	-15	dBc
Power dissipation	P	Small signal	-	3.6	5.2	W

Conditions: S parameters -30 dBm,  $T_{amb} = 25$  °C, 50  $\Omega$  system


## Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Min	Max	Unit
RF input voltage	$V_{in}$	-	0.6	$V_{pp}$
Supply voltage	$V_{bias}$	0	13	V
DC current	$I_{bias}$	0	400	mA
Gain control voltage	$V_{amp}$	0	1.3	V
Power dissipation	$P_{diss}$	-	5.2	W
Temperature of operation	$T_{op}$	0	+40	W
Storage temperature	$T_{st}$	-10	+70	°C


**$S_{21}$  and Group Delay Parameter Curves**

Conditions:  $V_{bias} = 12\text{ V}$ ,  $V_{amp} = 1.2\text{ V}$ ,  $I_{bias} = 300\text{ mA}$

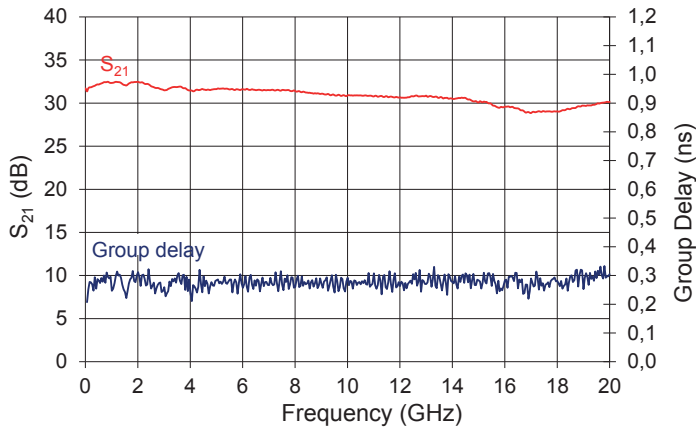


**$S_{12}$  Parameter Curve**

Conditions:  $V_{bias} = 12\text{ V}$ ,  $V_{amp} = 1.2\text{ V}$ ,  $I_{bias} = 300\text{ mA}$

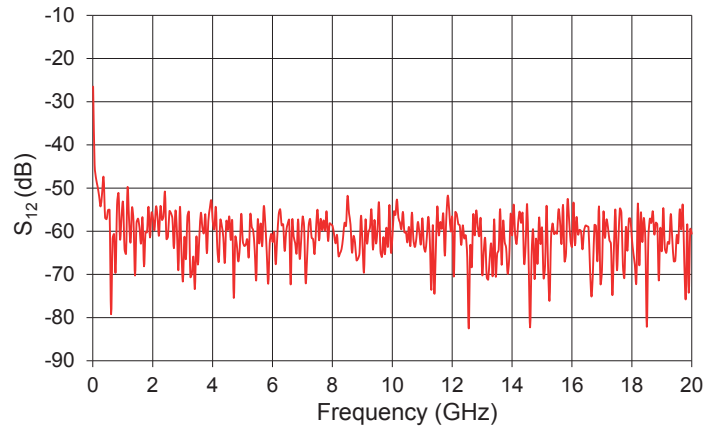


**$S_{22}$  Parameter Curve**

Conditions:  $V_{bias} = 12\text{ V}$ ,  $V_{amp} = 1.2\text{ V}$ ,  $I_{bias} = 300\text{ mA}$

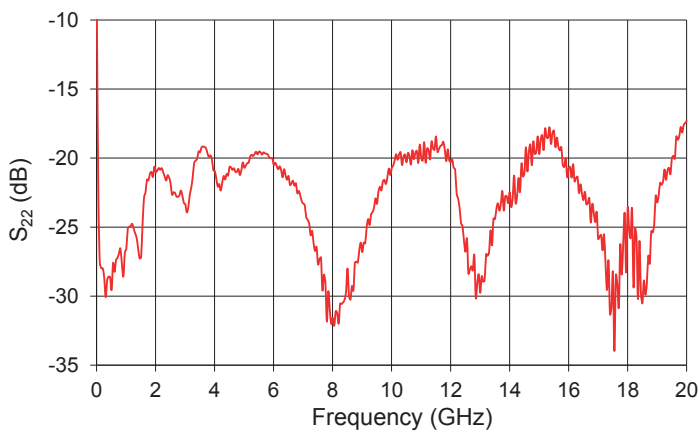


**$S_{11}$  Parameter Curve**

Conditions:  $V_{bias} = 12\text{ V}$ ,  $V_{amp} = 1.2\text{ V}$ ,  $I_{bias} = 300\text{ mA}$

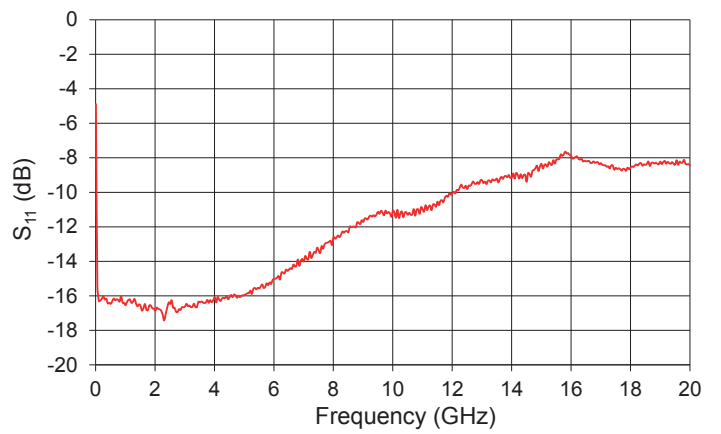


**Saturated Output Power Curve**

Conditions:  $V_{bias} = 12\text{ V}$ ,  $V_{amp} = 1.2\text{ V}$ ,  $I_{bias} = 300\text{ mA}$

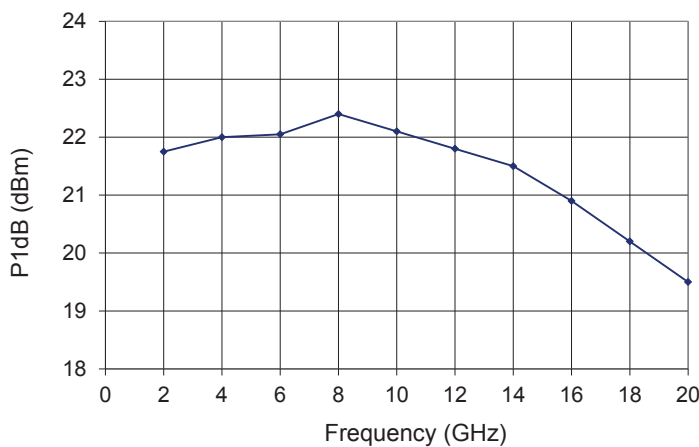


**Noise Figure Curve**


Conditions:  $V_{bias} = 12\text{ V}$ ,  $V_{amp} = 1.2\text{ V}$ ,  $I_{bias} = 300\text{ mA}$

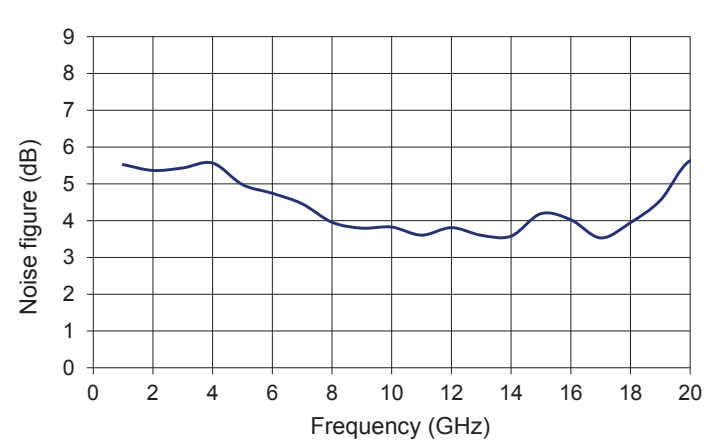

Electrical Schematic Diagram

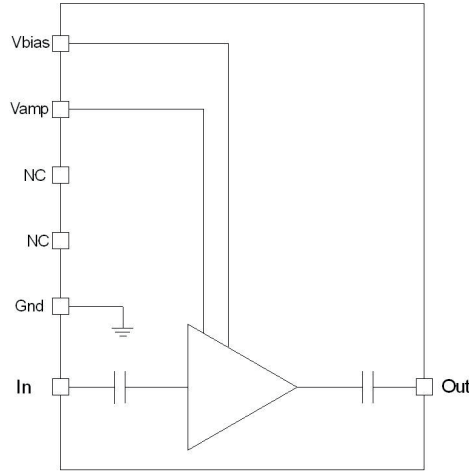

Mechanical Diagram and Pinout  
All measurements in mm

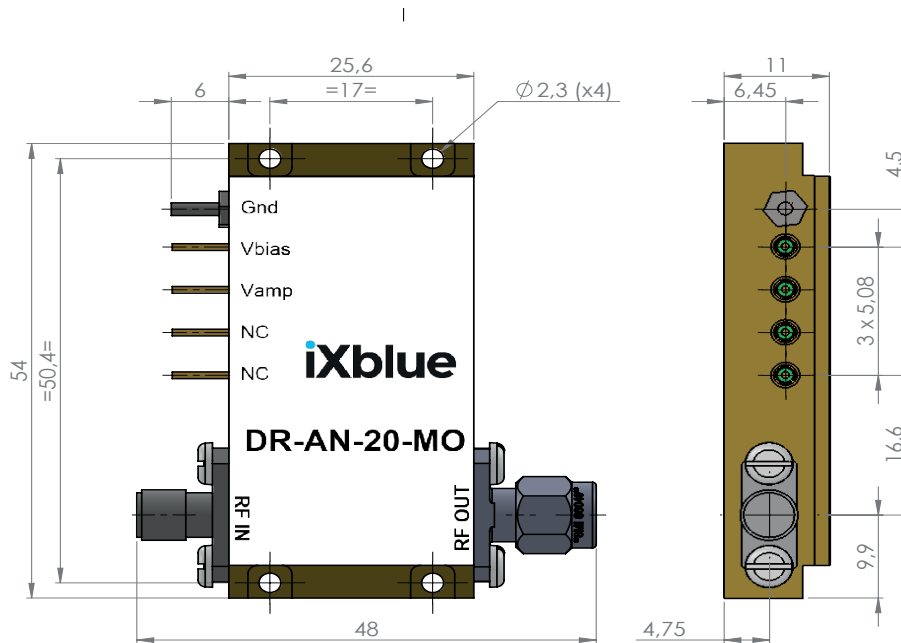


The heatsinking of the module is necessary. It's user responsibility to use an adequate heatsink. Refer to page 5 for ixBlue recommended heatsink.

PIN	Function	Operational Notes
IN	RF In	K-connector female
OUT	RF Out	K-connector male
V <sub>bias</sub>	Power supply voltage	Set at typical operating specification
V <sub>amp</sub>	Output voltage amplitude adjustment	Adjust for gain control tuning

Mechanical Diagram and Pinout with HS-MO2 Heatsink

All measurements in mm

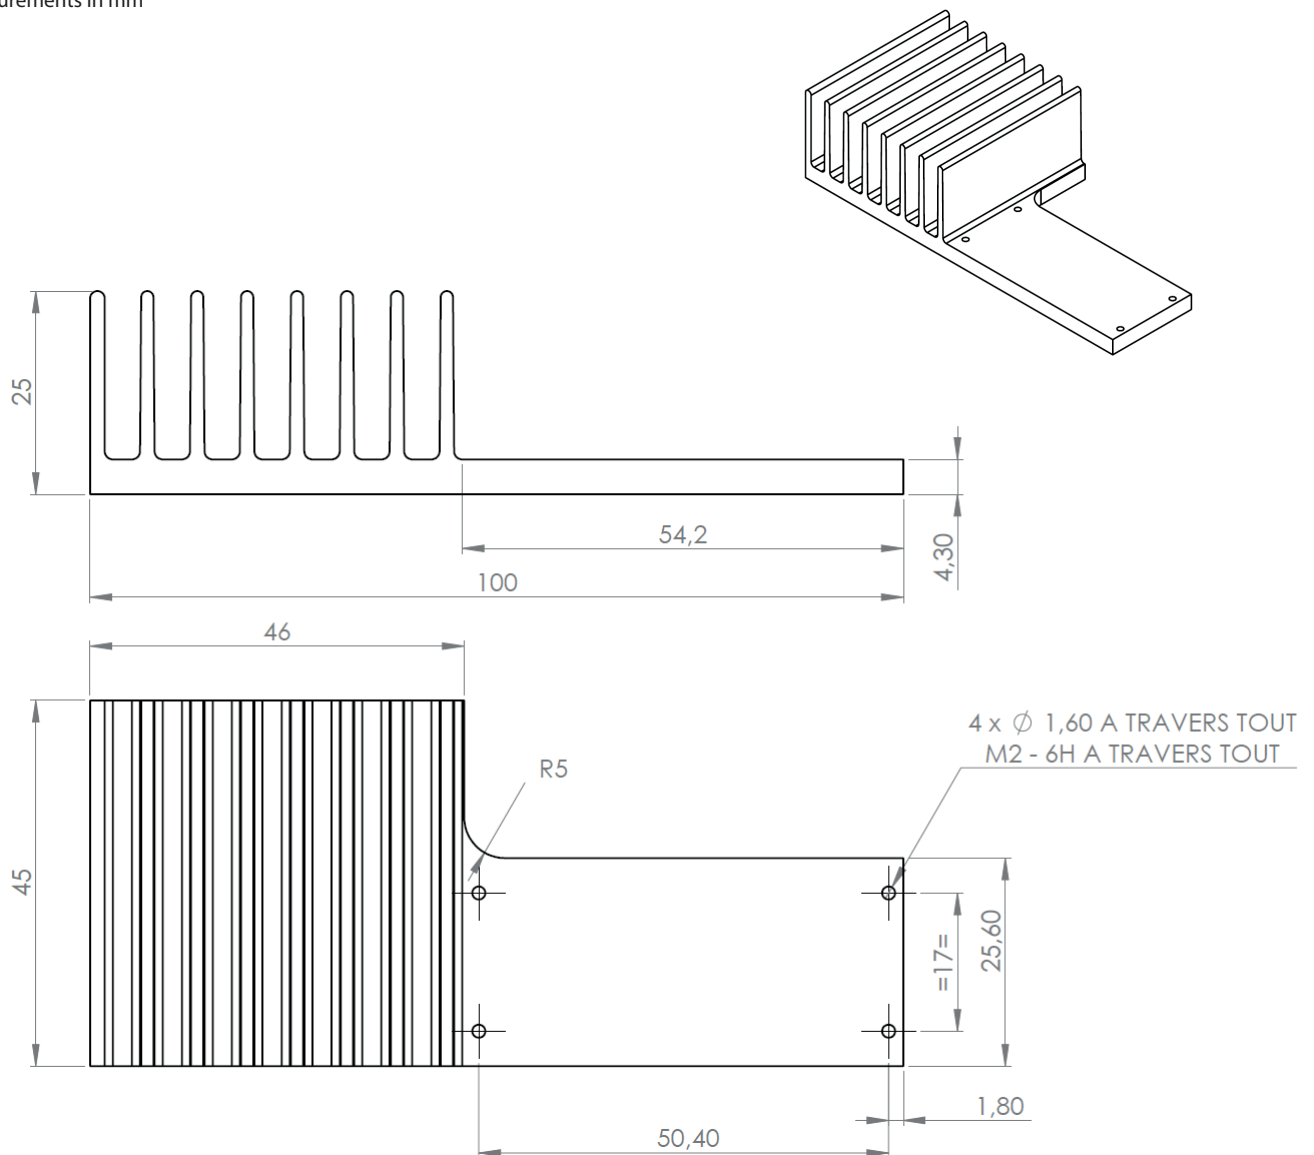

About us

ixBlue Photonics produces specialty optical fibers and Bragg gratings based fiber optics components and provides optical modulation solutions based on the company lithium niobate (LiNbO<sub>3</sub>) modulators and RF electronic modules.

ixBlue Photonics serves a wide range of industries: sensing and instruments, defense, telecommunications, space and fiber lasers as well as research laboratories all over the world.

3, rue Sophie Germain  
25 000 Besançon - FRANCE  
Tel. : +33 (0) 381 853 180 - Fax : + 33 (0) 381 811 557

ixblue reserves the right to change, at any time and without notice, the specifications, design, function or form of its products described herein. All statements, specification, technical information related to the products herein are given in good faith and based upon information believed to be reliable and accurate at the moment of printing. However the accuracy and completeness thereof is not guaranteed. No liability is assumed for any inaccuracies and as a result of use of the products. The user must validate all parameters for each application before use and he assumes all risks in connection with the use of the products