

EYP-DFB-0780-00040-1500-BFY02-0x0x

Revision 1.00

28.09.2015

SINGLE FREQUENCY LASER DIODES

Distributed Feedback Laser




page 1 of 5

General Product Information

Product	Application
780 nm DFB Laser with hermetic Butterfly Housing	Spectroscopy
Monitor Diode, Thermoelectric Cooler and Thermistor	Metrology
PM Fiber with angle-polished Connector	
based on highly reliable space-qualified design	

Absolute Maximum Ratings

	Symbol	Unit	min	typ	max
Storage Temperature	T_S	°C	-40		85
Operational Temperature at Case	T_C	°C	-40		85
Operational Temperature at Laser Chip	T_{LD}	°C	10		50
Forward Current	I_F	mA			160
Reverse Voltage	V_R	V			2
Output Power	P_{opt}	mW			50
TEC Current	I_{TEC}	A			1.8
TEC Voltage	V_{TEC}	V			3.2

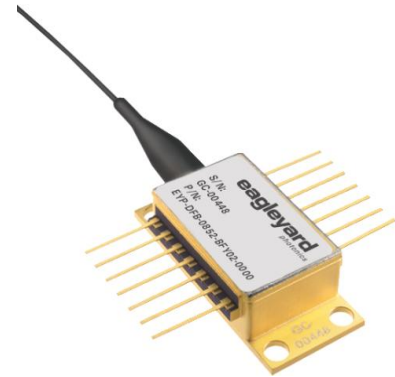

Stress in excess of the Absolute Maximum Ratings can cause permanent damage to the device.

Recommended Operational Conditions

	Symbol	Unit	min	typ	max
Operational Temperature at Case	T_C	°C	-20		65
Forward Current	I_F	mA			140
Variant 0 (EYP-DFB-...-0000)					
Operational Temperature at Laser Chip	T_{LD}	°C		25	
Output Power	P_{opt}	mW		40	
Variant 2 (EYP-DFB-...-0002)					
Operational Temperature at Laser Chip	T_{LD}	°C	15		40
Output Power	P_{opt}	mW	10		40

Measurement Conditions / Comments

Variant 2 allows wavelength tuning by temperature or current variation; in case of external backreflections small mode-hops of 100 MHz or less may appear; the use of a BFW01 or TOC03 package variants and effective optical isolation is recommended for spectroscopic application requiring absolutely mode-hop-free tuning

Characteristics at $T_{LD} = 25^\circ\text{C}$ at Begin Of Life

Parameter	Symbol	Unit	min	typ	max
Center Wavelength	λ_C	nm	779	780	781
Spectral Width (FWHM)	$\Delta\nu$	MHz		2	

Measurement Conditions / Comments

see images on page 4

$P_{opt} = 40\text{ mW}$

EYP-DFB-0780-00040-1500-BFY02-0x0x

Revision 1.00

00.01.1900

SINGLE FREQUENCY LASER DIODES

Distributed Feedback Laser



page 2 of 5

Characteristics at $T_{LD} = 25^\circ C$ at Begin Of Life cont'd

Parameter	Symbol	Unit	min	typ	max
Temperature Coefficient of Wavelength	$d\lambda / dT$	nm / K		0.06	
Tuning Range by Temperature for Variant 2	$\Delta\lambda_T$	nm		1.5	
Current Coefficient of Wavelength	$d\lambda / dI$	nm / mA		0.003	
Output Power @ $I_f = 140$ mA	P_{opt}	mW	40		
Slope Efficiency	S	W / A	0.15	0.5	0.8
Threshold Current	I_{th}	mA			70
Sidemode Suppression Ratio	SMSR	dB	30	45	
Polarization Extinction Ratio	PER	dB		15	

Measurement Conditions / Comments

see comment on p. 1

$P_{opt} = 40$ mW; $T_{LD} = 25^\circ C$

Monitor Diode

Parameter	Symbol	Unit	min	typ	max
Monitor Detector Responsivity	I_{mon} / P_{opt}	$\mu A / mW$	1		20
Reverse Voltage Monitor Diode	U_{RMD}	V	3		5

Measurement Conditions / Comments

$U_R = 5$ V

Thermoelectric Cooler

Parameter	Symbol	Unit	min	typ	max
Current	I_{TEC}	A		0.4	
Voltage	U_{TEC}	V		0.8	
Power Dissipation (total loss at case)	P_{loss}	W		0.5	
Temperature Difference	ΔT	K			50

Measurement Conditions / Comments

$P_{opt} = 40$ mW, $\Delta T = 20$ K

$P_{opt} = 40$ mW, $\Delta T = 20$ K

$P_{opt} = 40$ mW, $\Delta T = 20$ K

$P_{opt} = 40$ mW, $\Delta T = |T_{case} - T_{LD}|$

Thermistor (Standard NTC Type)

Parameter	Symbol	Unit	min	typ	max
Resistance	R	k Ω		10	
Beta Coefficient	β			3892	

Measurement Conditions / Comments

at $T = 0^\circ \dots 50^\circ C$

EYP-DFB-0780-00040-1500-BFY02-0x0x

Revision 1.00

00.01.1900

SINGLE FREQUENCY LASER DIODES

Distributed Feedback Laser

page 3 of 5

Fiber and Connector Type


PM Fiber	900 / 125 / 5.5 μ m, UV/Polyester-elastomer Coating (l = 1 +/-0.1 m)
Connector	different variants available <ul style="list-style-type: none"> ▶ FC/APC (narrow key / 2mm) ▶ SC/APC ▶ other types on request

Measurement Conditions / Comments


see order code scheme

Package Pinout


1	Thermoelectric Cooler (+)	14	Thermoelectric Cooler (-)
2	Thermistor	13	Case
3	Photodiode (Anode)	12	not connected
4	Photodiode (Cathode)	11	Laser Diode (Cathode)
5	Thermistor	10	Laser Diode (Anode)
6	not connected	9	not connected
7	not connected	8	not connected



Package Drawings

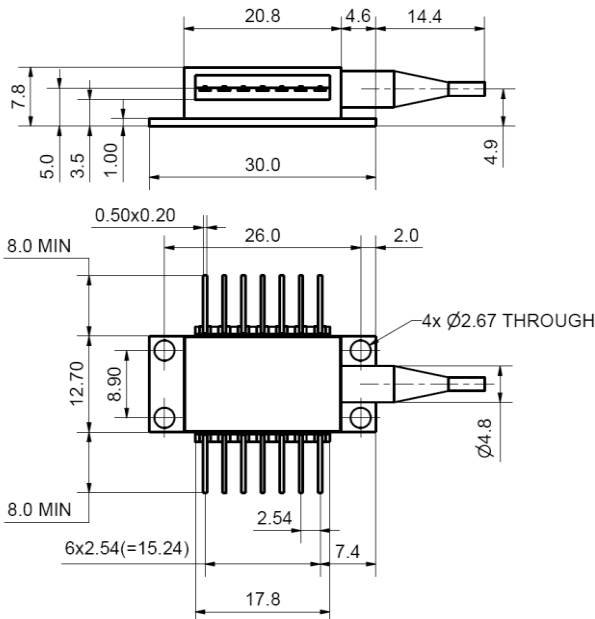

recommended
min. bending radius: 30 mm

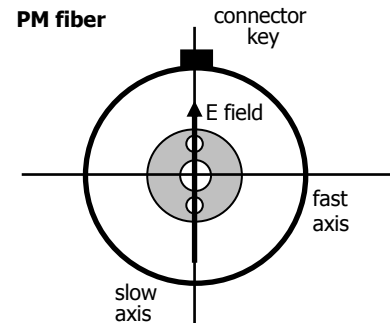

slow axis of the PM fiber aligned to connector key

hermetically sealed Package:

Leak Rate <math> < 5 \cdot 10^{-8}</math> atm.cc./s
acc. MIL-STD-883E

Z11-SPEC-BFY02-DFB-0000

EYP-DFB-0780-00040-1500-BFY02-0x0x

Revision 1.00

00.01.1900

SINGLE FREQUENCY LASER DIODES

Distributed Feedback Laser





page 4 of 5

Typical Measurement Results

Output Power vs. Current

Spectra at Specified Optical Output Power

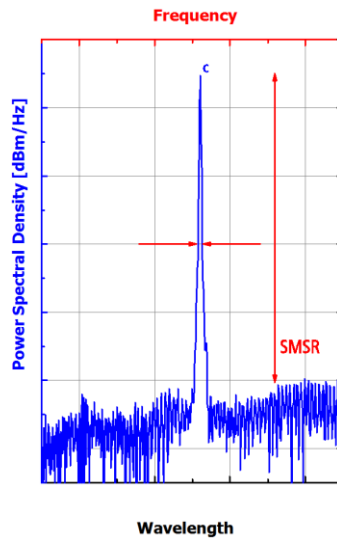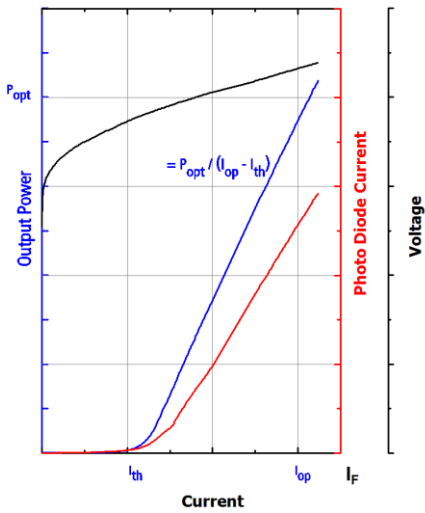

Performance figures, data and any illustrative material provided in this specification are typical and must be specifically confirmed in writing by eagleyard Photonics before they become applicable to any particular order or contract. In accordance with the eagleyard Photonics policy of continuous improvement specifications may change without notice.

EYP-DFB-0780-00040-1500-BFY02-0x0x

Revision 1.00

00.01.1900

SINGLE FREQUENCY LASER DIODES

Distributed Feedback Laser

page 5 of 5


Order Code Scheme

Connector

FC/APC (narrow key / 2mm)
SC/APC
other connector or fiber types upon request

Operating Range

$P_{opt} = 40 \text{ mW};$	$T_{LD} = 25^\circ$	(Variant 0)
$P_{opt} = 10 \dots 40 \text{ mW};$	$T_{LD} = 15^\circ \dots 40^\circ \text{ C}$	(Variant 2)

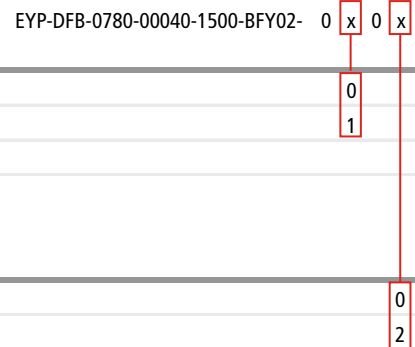

Unpacking, Installation and Laser Safety

Unpacking the laser diodes should only be done at electrostatic safe workstations (EPA). Though protection against electro static discharge (ESD) is implemented in the laser package, charges may occur at surfaces. Please store this product in its original package at a dry, clean place until final use. During device installation, ESD protection has to be maintained.

The DFB diode type is known to be sensitive against optical feedback, so an optical isolator may be required in some cases. Operating at moderate temperatures on a proper metal heat sinks will contribute to stable operation and a long lifetime of the diode.

The laser emission from this diode is close to the invisible infrared region of the electromagnetic spectrum. Avoid direct and/or indirect exposure to the free running beam. Collimating the free running beam with optics as common in optical instruments will increase threat to the human eye.

Each laser diode will come with an individual test protocol verifying the parameters given in this document.

Laser Emission

INVISIBLE LASER RADIATION
AVOID EYE OR SKIN EXPOSURE
TO DIRECT OR SCATTERED RADIATION
CLASS 4 LASER PRODUCT
WAVELENGTH 780 nm
MAX. LASER POWER 50 mW
IEC 60825-1

DANGER
INVISIBLE LASER RADIATION
AVOID EYE OR SKIN EXPOSURE TO
DIRECT OR SCATTERED RADIATION
Gas Semiconductor Laser Diode
50 mW MAX OUTPUT AT 780 nm
CLASS IV LASER PRODUCT
Complies with 21 CFR 1040.10 and 1040.40

Ordering Information:



800 Village Walk #316
Guilford, CT 06437
Ph: 203-401-8093

Email orders to: sales@xsoptix.com
Fax orders to: 800-878-7282

