

SPECIFICATIONS

AO Medium		TeO2
Acoustic Velocity		4.2 mm/μs
Active Aperture*	1 mm 'L' X	0.1 mm 'H'
Center Frequency (Fc)		200 MHz
RF Bandwidth	90 MHz @	-10 dB Return Loss
Input Impedance		50 Ohms Nominal
VSWR @ Fc		1.3:1 Max
Wavelength		1047-1060 nm
Insertion Loss		4 % Max
Reflectivity per Surface		0.5 % Max
Anti-Reflection Coating		MIL-C-48497
Optical Power Density		50 MW/cm ²
Contrast Ratio		1000:1 Min
Polarization		90 ° To Mounting Plane

PERFORMANCE VS WAVELENGTH

Wavelength (nm)	1060
Saturation RF Power (W)	2.5
Bragg Angle (mr)	25.2
Beam Separation (mr)	50.4

PERFORMANCE VS BEAM DIAMETER


Beam Diameter (μm)	50	65
<i>at Wavelength (nm)</i>	1060	1060
Diffraction Efficiency (%)	75	80
Rise Time (nsec)	10	12
Modulation Bandwidth	NA	NA
Beam Ellipticity	NA	NA

Special Testing	Min	Units	Max
Loss Modulation	80	%	

For Reference Only

*Active Aperture: Aperture over which performance specifications apply.

Outline Drawing: Package Style 1, w/ heat sink

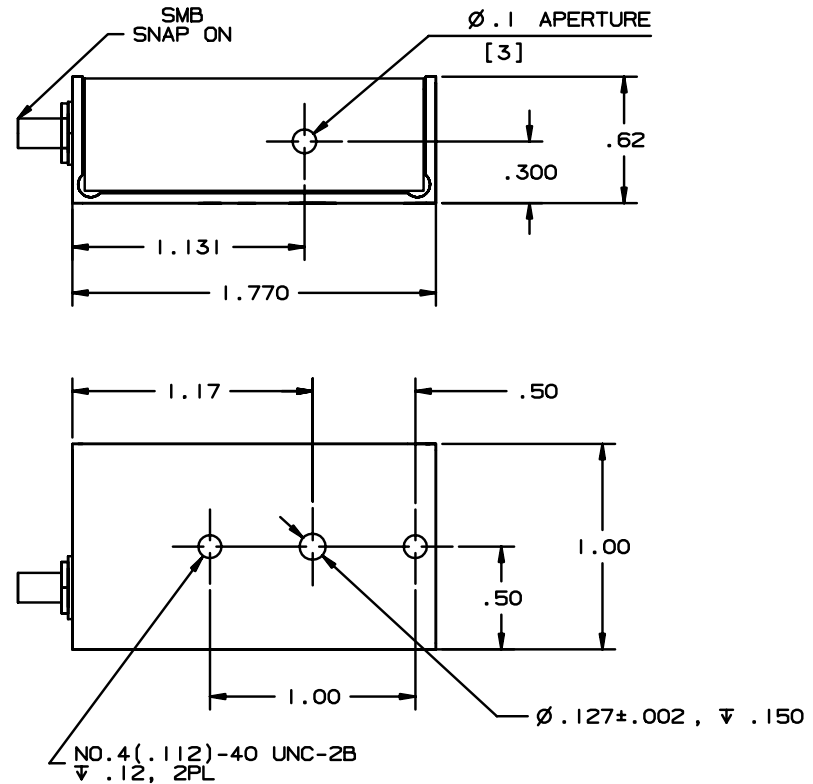

Notes:
Loss Modulation 85% Min. at 50 μm beam diameter.

Ordering Information:
 800 Village Walk #316
 Guilford, CT 06437
 Ph: 203-401-8093
 Email orders to: sales@xsoptix.com
 Fax orders to: 800-878-7282

THIS DOCUMENT IS THE PROPERTY OF CRYSTAL TECHNOLOGY, INC. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES CRYSTAL TECHNOLOGY AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF CRYSTAL TECHNOLOGY.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	A. Campi 6/27/2002	Crystal Technology, Inc. DESCRIPTION: AOMO 3200-1113 TeO2; 1.06 μm; 200 MHz
MATERIAL:	CHK		
FINISH:	APP		
	APP	PART NUMBER: 97-02029-05	REV: A