


# Gooch & Housego

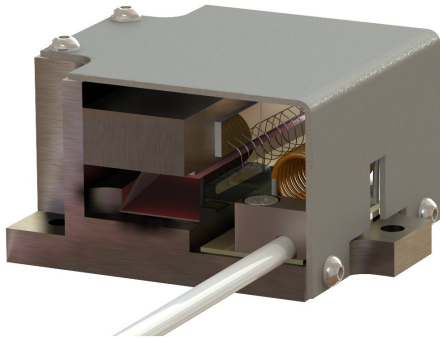

## 1030 – 1064nm Acousto-Optic Modulator

I-M080-2C10G-4-AM3

An acousto-optic modulator for use in the 1030 – 1064nm wavelength range, ideal for extra-cavity modulation, power control or stabilisation of high power picosecond or nanosecond solid state lasers.

Manufactured in Crystal Quartz for improved thermal management and high damage threshold. This modulator combines high quality optical finishing with high grade anti-reflection coatings to maintain superior beam quality and high optical throughput.

In addition to the specifications indicated, we also offer alternative wavelengths, RF frequencies, active apertures & a wide range of custom housing configurations. We also offer full custom design & manufacturing, enabling our customers to achieve the perfect solution.

Our scientists and engineers are available to assist in selecting the most appropriate Acousto-Optic device and RF driver for your application.

Please contact our sales team for further information.

### Key Features:

- Crystal Quartz
- 1030 – 1064nm
- High damage threshold
- 80MHz

### Applications:

- Industrial (material processing):
  - Pulse Picking
  - Laser intensity control

### Ordering Information:



800 Village Walk #316  
Guilford, CT 06437  
Ph: 203-401-8093

Email orders to: [sales@xsoptix.com](mailto:sales@xsoptix.com)  
Fax orders to: 800-878-7282

Contact: [sales@goochandhousego.com](mailto:sales@goochandhousego.com)

[www.goochandhousego.com](http://www.goochandhousego.com)

As part of our policy of continuous product improvement we reserve the right to change specifications at any time  
IWDS027 V1.0

### General Specifications

Model No:	I-M080-2C10G-4-AM3
Device:	AO Modulator
Interaction material:	Crystal Quartz
Wavelength:	1030-1064nm
Damage threshold:	> 1GW/cm <sup>2</sup>
AR coating reflectivity:	< 0.3% per surface
Transmission:	> 99.4%
Frequency:	80MHz
Optical polarisation:	Linear, vertical to base
Active aperture:	2.0mm
Acoustic mode:	Compressional
Separation angle:	14.9mrad
Rise-time (10-90%):	113ns/mm
Diffraction Efficiency:	≥ 85%
Maximum RF power:	15W
Cooling:	Conduction

### Ordering Code

**Explanation: I-M080-2C10G-4-AM3** (Modulator, 80MHz, 2.0mm active aperture, compressional mode, Crystal Quartz, 1030 - 1064nm, SMA female pigtail, AM3 housing).

**I - M 0 8 0 - 2 C 1 0 G - 4 - A M 3**

