

Key Features

- Turn-key pico-second light source 500nm – 2200nm

Applications

- Test & Measurement, Sensing, R&D, etc.


Typical Specifications

Parameter	Min.	Typ.	Max.	Units
Output power	-	1.5	2	W
Wavelength	500	-	2200	nm
Temperature range of operation	15	25	45	°C
Power consumption ⁽¹⁾	-	-	70	W
Output Connectors	FC/APC, etc.			

Specifications are subject to change without prior notice

Note

- (1) Electrical power consumption depends on the optical output power level

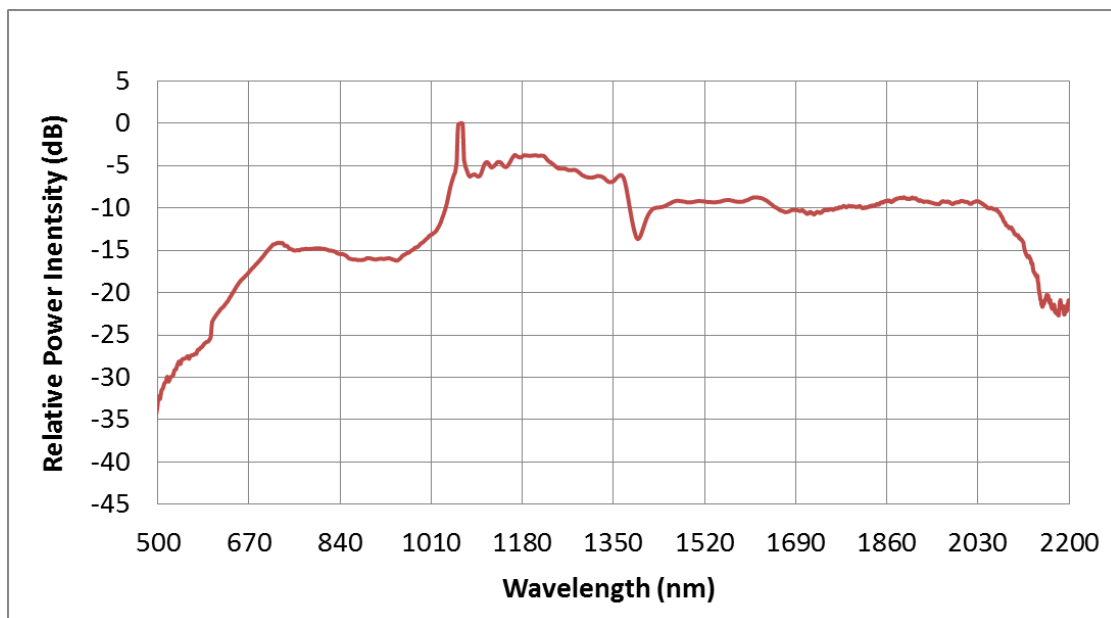

Optical Spectrum of 1.5W supercontinuum source

Ordering Information:

Ordering Example

Model Number	SC-2000
Wavelength Range [nm]	500-2200
Package Type	Table-top
Optical Output Power [mW]	2000
Optical Input / Output Termination	FC/APC

Ordering Information:

800 Village Walk #316

Guilford, CT 06437

Ph: 203-401-8093

Email orders to: sales@xsoptix.com

Fax orders to: 800-878-7282