



# Water-Cooled Thermopile Sensors to 5 kW

## Compact, Water-Cooled Laser Power Sensors

These compact sensors are particularly useful when space is an issue. They must be water-cooled to achieve the full power rating, and they can also be used air-cooled (stand-alone or mounted to a heat sink) for stand-alone intermittent application of power.

### FEATURES

- Compact designs
- Use water-cooled or air-cooled
- 19 mm and 50 mm apertures

### APPLICATIONS

- Medical
- Scientific
- Industrial
- General Laser Power Measurement to 5 kW



#### Ordering Information:



800 Village Walk #316  
Guilford, CT 06437  
Ph: 203-401-8093

Email orders to: [sales@xsoptix.com](mailto:sales@xsoptix.com)


Fax orders to: 800-878-7282

| SPECIFICATIONS                               | PM10-19C            | PM150-19C       | PM150-50C            | PM300            |
|----------------------------------------------|---------------------|-----------------|----------------------|------------------|
| Wavelength Range (μm)                        | 0.25 to 11          |                 |                      |                  |
| Power Range (water-cooled)                   | 10 mW to 10 W       | 300 mW to 150 W | 300 mW to 150 W      | 1 W to 300 W     |
| Maximum Intermittent Power (W) (<5 min.)     | 5 <sup>1</sup>      | 20 <sup>1</sup> | 80 <sup>1</sup>      | 450 <sup>2</sup> |
| Long-Pulse Joules Range (J)                  | 0.5 to 10           | 1 to 150        | 1 to 150             | –                |
| Resolution (mW)                              | 1                   | 30              | 30                   | 100              |
| Maximum Power Density (kW/cm <sup>2</sup> )  | 6                   |                 |                      |                  |
| Maximum Energy Density (mJ/cm <sup>2</sup> ) | 600, 1064 nm, 10 ns |                 |                      |                  |
| Response Time (sec.)                         | 2                   | 2               | 5                    | 5                |
| Detector Coating                             | Broadband           |                 |                      |                  |
| Active Area Diameter (mm)                    | 19                  | 19              | 50                   | 19               |
| Calibration Uncertainty (%) (k=2)            | ±1                  |                 |                      |                  |
| Calibration Wavelength (μm)                  | 514                 |                 |                      |                  |
| Cooling Method                               | Water-cooled        |                 |                      |                  |
| Cable Type                                   | PM DB-25            |                 |                      |                  |
| Cable Length (m)                             | 2                   |                 |                      |                  |
| Part Number                                  | 1098397             | 1098444         | 1098412 <sup>3</sup> | 1141474          |


1 This intermittent power rating is for when the sensor is used without water-cooling.  
2 This intermittent power rating is for when the sensor is used with water-cooling.  
3 1 Day Ship program: eligible for next business day shipment.

## MECHANICAL SPECIFICATIONS


### PM10-19C/PM150-19C

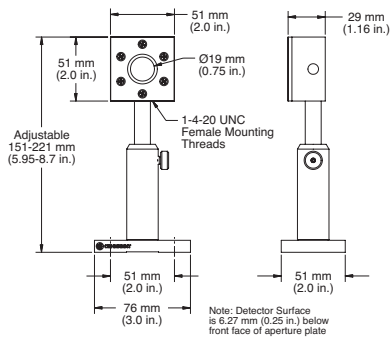

### PM150-50C

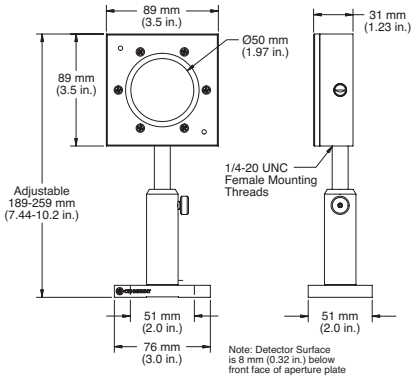

### PM300

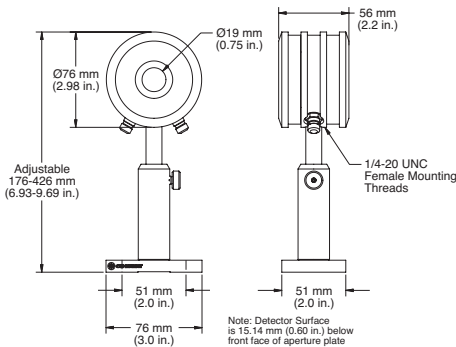


| SPECIFICATIONS                               | PM150X              | PM150-50XC           |
|----------------------------------------------|---------------------|----------------------|
| Wavelength Range (μm)                        | 0.15 to 1.064       |                      |
| Power Range                                  | 300 mW to 150 W     |                      |
| Maximum Intermittent Power (W) (<5 min.)     | 300                 | 80 (air-cooled)      |
| Long-Pulse Joules Range (J)                  | 1 to 150            |                      |
| Resolution (mW)                              | 30                  |                      |
| Maximum Power Density (kW/cm <sup>2</sup> )  | 6                   |                      |
| Maximum Energy Density (mJ/cm <sup>2</sup> ) | 600, 1064 nm, 10 ns |                      |
| Response Time (sec.)                         | 5                   |                      |
| Detector Coating                             | UV                  |                      |
| Active Area Diameter (mm)                    | 50                  |                      |
| Calibration Uncertainty (%) (k=2)            | ±1                  |                      |
| Calibration Wavelength (μm)                  | 514                 |                      |
| Cooling Method                               | Air-cooled          | Water-cooled         |
| Cable Type                                   | PM DB-25            |                      |
| Cable Length (m)                             | 2                   |                      |
| Part Number                                  | 1098455             | 1098443 <sup>1</sup> |


<sup>1</sup> Water fittings are included with PM150-50XC.

## MECHANICAL SPECIFICATIONS

### PM150X

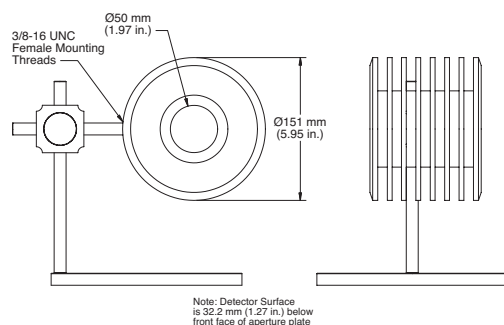

### PM150-50XC

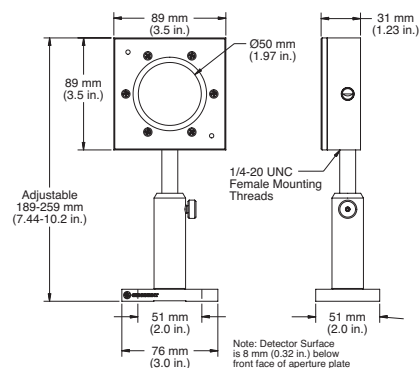

Coherent, Inc.,  
 5100 Patrick Henry Drive Santa Clara, CA 95054  
 p. (800) 527-3786 | (408) 764-4983  
 f. (408) 764-4646

[tech.sales@coherent.com](mailto:tech.sales@coherent.com) [www.coherent.com](http://www.coherent.com)

Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice. Coherent's scientific and industrial lasers are certified to comply with the Federal Regulations (21 CFR Subchapter J) as administered by the Center for Devices and Radiological Health on all systems ordered for shipment after August 2, 1976.

Coherent offers a limited warranty for all Thermopile Sensors. For full details of this warranty coverage, please refer to the Service section at [www.coherent.com](http://www.coherent.com) or contact your local Sales or Service Representative.  
 MC-012-21-0M0621 Copyright ©2021 Coherent, Inc.